UNCLASSIFIED

AD NUMBER AD854584 **NEW LIMITATION CHANGE** TO Approved for public release, distribution unlimited **FROM** Distribution authorized to U.S. Gov't. agencies and their contractors; Critical Technology; APR 1969. Other requests shall be referred to US Air Force Rocket Propulsion Laboratory, Attn: RPOR-STINFO], Edwards AFB, CA 93523. **AUTHORITY** AFRPL 1tr, 21 Mar 1974


AD854584

THE CATALYTIC DECOMPOSITION OF HYDRAZINE ON GOLD, NICKEL, AND A GOLD/NICKEL BRAZING ALLOY

L. A. DEE, T. W. OWENS
A. K. WEBB, AND J. T. NAKAMURA

TECHNICAL REPORT AFRPL-TR-59-77

APRIL 1969



THIS DOCUMENT IS SUBJECT TO SPECIAL EXPORT CONTROLS AND EACH TRANSMITTAL TO FOREIGN GOVERNMENTS OR FOREIGN NA FIONALS MAY BE MADE ONLY WITH PRIOR APPROVAL OF AFRPL (RPOR-STINFO), EDWARDS, CAL!FGRNIV. 93523.

AIR FORCE ROCKET PROPULSION LABORATORY
AIR FORCE SYSTEMS COMMAND
UNITED STATES AIR FORCE
EDWARDS, CALIFORNIA


THE CATALYTIC DECOMPOSITION OF HYDRAZINE ON GOLD, NICKEL, AND A GOLD/NICKEL BRAZING ALLOY

L. A. Dee
T. W. Owens
A. K. Webb
J. T. Nakamura

This document is subject to special export controls and each transmittal to foreign governments or foreign nationals may be made only with prior approval of AFRPL (RPOR-STINFO), Edwards, California 93523.

NOTICES

When U.S. Government drawings, specifications, or other data are used for any purpose other than a definitely related Government procurement operation, the Government thereby incurs no responsibility nor any obligation whatsoever, and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data, is not to be regarded by implication or otherwise, or in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.



FOREWORD

A gold/nickel (82:18) brazing alloy is presently specified for use in several missile systems wherein the alloy will be in direct contact with the liquid propellant, hydrazine, or with hydrazine blends. Available chemical compatibility data for these materials are conflicting. The Air Force Rocket Propulsion Laboratory Specifications and Standards Branch requested that the Chemical and Materials Branch resolve the conflicting compatibility data. The NASA White Sands Test Facility requested that additional data on the compatibility of a gold/nickel (82:18) brazing alloy with UDMH/hydrazine (50:50) also be obtained. This work was accomplished in support of Project 060JSSZAT during the period September 1966 to September 1967.

The authors are indebted to Mr. P.O. Gants, NASA, White Sands, for providing a sample of the 82:18 Au/Ni alloy.

This report has been reviewed and approved.

W.S. ANDERSON Chemical and Materials Branch Propellant Division Air Force Rocket Propulsion Laboratory

ABSTRACT

A laboratory study was conducted to resolve conflicting published data on the chemical compatibility of hydrazine with gold. Hydrazine and unsdimethylhydrazine/hydrazine (50:50) were tested for compatibility with several metals including a gold/nickel (82:18) brazing alloy which is specified for use in several missile propellant systems designed for hydrazine and for hydrazine fuel blends. Gold, nickel, and the gold/nickel brazing alloy decompose hydrazine catalytically.

TABLE OF CONTENTS

<u>Section</u>	<u>1</u>																			<u> </u>	Page
I	INT	RODU	CTIC	N	•	•		•	•	•	•	•	•	•	•	•	•	•	•	. •	1
п	EX	PERIN	MENT	ΑL	PR	OC:	ED	JRE	2	•	•	•	•	•	•	•	•	•	•	•	1
	A.	Gas	Chror	nato	ogr.	aph	Me	tho	d	•	•	•	•	•	•	•	•	•	•	•	1
	в.	Imm	ersio	n M	eth	od	• •	•	•	•	•	•	•	•	•	•	•	•	•	•	2
Ш	RES	SULTS	ANI	DI	scı	JSS:	ION	•	•	•	•.	•	•	•	•	•	•	•	•	•	5
IV ·	COI	NCLU	SIONS	S .	•	•		•	•	•	•	,	•	•			•	•	•	•	8
DISTR	IBUT	NOI		•	•	•		•	•	•	•	•	•	•	•	•	•		•	•	11
EOD14	147	2																			17

ILLUSTRATIONS

Figure			Page
1	Gas Chromatograph and Inlet	•	. 3
2	Immersion Test Apparatus	•	. 4
3	$\mathrm{NH_3}$ from $\mathrm{N_2H_4}$ by Gas Chromatograph Method	•	. 6
4	$\mathrm{NH_{3}}$ from $\mathrm{UDMH/N_{2}H_{4}}$ by Gas Chromatograph Method .	•	. 7
5	NH_3 from UDMH/ N_2H_4 by Immersion Test Method	•	. 9

TABLES

Table										I	Page
I	Chromatograph Test Conditions	•	•		•				•	•	2
II	Immersion Test Conditions .	•	•	•	•		•	•			2
III	Materials Tested										5

THE CATALYTIC DECOMPOSITION OF HYDRAZINE ON GOLD, NICKEL, AND A GOLD/NICKEL BRAZING ALLOY

I. INTRODUCTION

A gold/nickel (82:18) brazing alloy is presently specified for use in several missile systems wherein the alloy will be in direct contact with the liquid propellant, hydrazine, or with hydrazine blends. Available chemical compatibility data for these materials are conflicting. Technical Order 00-25-223, paragraph 1-33b, warns that "Gold, even in minute amounts, shall not be used in contact with hydrazine, uns-dimethylhydrazine (UDMH), ammonia, or ammonia-based fuels". AFRPL-TI-4-2-5 reflects a satisfactory rating for gold in the presence of a member of the general amine family, but provides no specific rating for hydrazine. The Defense Missile Information Center Memorandum 201 indicates that gold is satisfactory for use with the hydrazines. The AFRPL Specifications and Standards Branch requested that the Chemical and Materials Branch resolve the conflicting compatibility data. The NASA White Sands Test Facility requested that additional data on the compatibility of a gold/nickel (82:18) brazing alloy with UDMH/hydrazine (50:50) also be obtained.

II. EXPERIMENTAL PROCEDURE

Two methods were used for determining the compatibility of various metals with hydrazine and UDMH/hydrazine. All metal test specimens were ultrasonically cleaned in trichlorofluoromethane, acetone, distilled water, and oven-dried at 70°C and 27 inches Hg vacuum.

A. Gas Chromatograph Method.

A thin ribbon of the test material was placed in the glass liner of a gas chromatograph flash vaporizer inlet (Beckman Model GC-4). The surface area and weight of the test specimen were measured prior to insertion into the inlet. Propellant-grade hydrazine and UDMH/hydrazine were injected into the inlet with the aid of a Hamilton syringe. The reaction products were separated from the unreacted propellant in the gas chromatograph column. The relative quantities of reaction products

and residual unreacted propellant were related to the compatibility of the test specimen with that propellant. The temperature of the test specimen in the inlet was varied over the desired range while all other test conditions remained constant. Figure 1 is a schematic of the apparatus used for the gas chromatograph method. Table I lists the test conditions.

TABLE I. CHROM.	ATOGRAPH TEST CONDITIONS							
Column - 6 ft x 1/4 in O.D. S/S - 10% Dowfax 9N9 - 60/80 mesh Teflon 5								
Column Temp.	100°C							
Inlet Temp.	60-200°C, variable							
Helium Flow	55 cc/min.							
Glass Liner Volume	0.22 cc							
Propellant Sample Size	1 μ ℓ							

B. Immersion Method.

Small samples of the alloy were placed in glass pressure vessels (Fisher-Porter Aerosol bottles), each fitted with a ball valve at the top. A ball valve was used to provide for extraction of a vapor sample through a septum with a long needle and a Hamilton gas syringe. The vapor samples were analyzed with a gas chromatograph equipped with the column described in Table I. With this technique the temperature was fixed and exposure time was the variable. Figure 2 illustrates the immersion apparatus. Table II describes the test conditions.

TABLE II.	IMMERSION TEST CONDITIONS	
Propellant Sample Volume	30 ml	
Ullage Volume	61 ml	
Test Temperature	140°F	

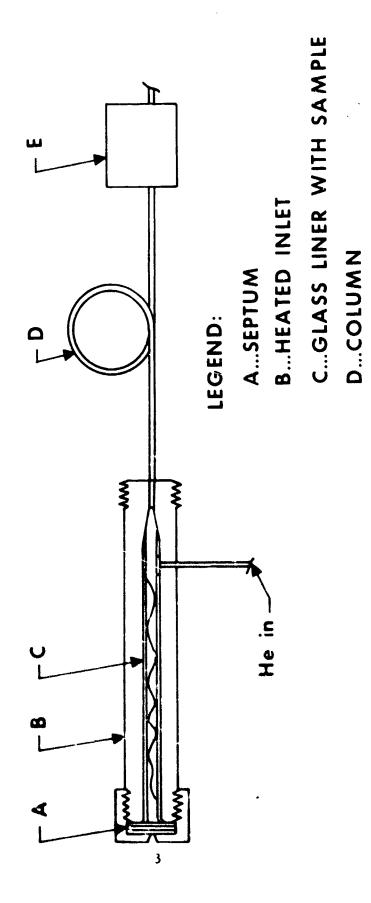


Figure 1. Gas Chromatograph and Inlet

E...DETECTOR

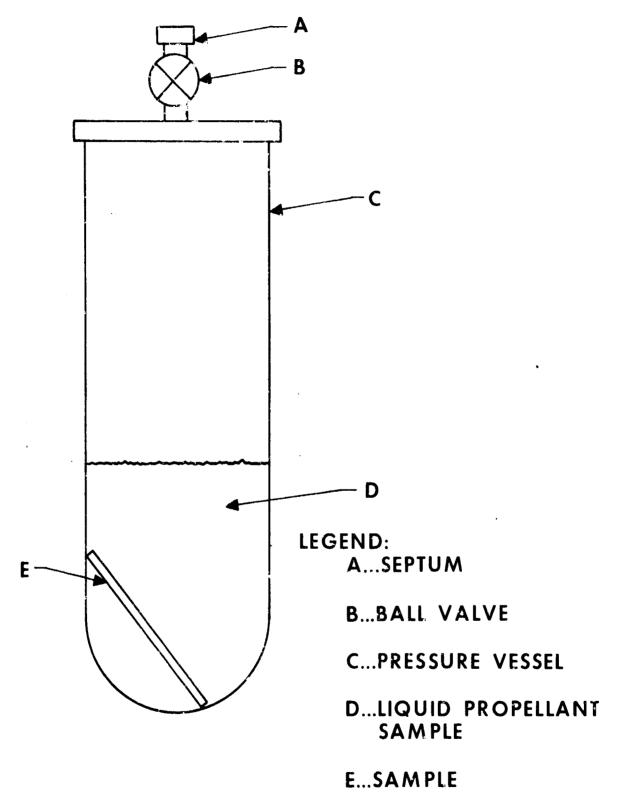


Figure 2. Immersion Test Apparatus

III. RESULTS AND DISCUSSION

A propellant blank determination was made for both hydrazine and the UDMH/hydrazine blend in the apparatus described. No significant reactions were noted. Table III lists the various materials tested in the gas chromatograph inlet and in the immersion test.

TABLE III.	MATERIALS TESTED
<u>Material</u>	Measured Surface Area (cm ²)
Gold	2.12
Aluminum	2.12
Nickel	2.12
82:18 Gold/Nickel Alloy	1.5
t .	3.7 ^a ·
Glass	5.6 b.
a. Surface Area Used in Each b. Empty Inlet Liner	Immersion Test

Figure 3 shows the normalized results of gas chromatograph tests on the various metals with hydrazine. The N₂H₄ is considerably more unstable when in contact with gold, nickel, or the alloy that with the other materials. The decomposition temperature (the first significant slope change) is slightly higher than expected. Noticeable hydrazine decomposition occurred at a lower temperature (140°F) during the immersion tests. Probably this results from the short residence time of the propellant in the inlet (ca. 0.25 sec.). The decomposition products are hydrogen, nitrogen, and ammonia. Figure 4 shows the normalized results of the gas chromatograph tests of the gold/nickel alloy with UDMH/N₂H₄. The neat hydrazine test results are presented again for comparison. Figure 4 indicates that hydrazine in the UDMH/N₂H₄ blend is less stable than neat hydrazine. The curves cross at 170°C because the quantity of hydrazine available for reaction becomes significant at this point. Since no change

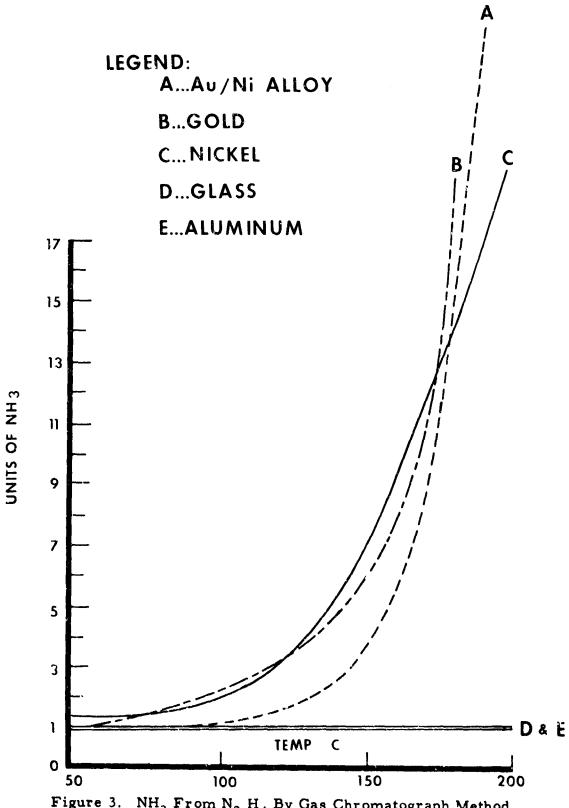


Figure 3. NH₃ From N₂ H₄ By Gas Chromatograph Method

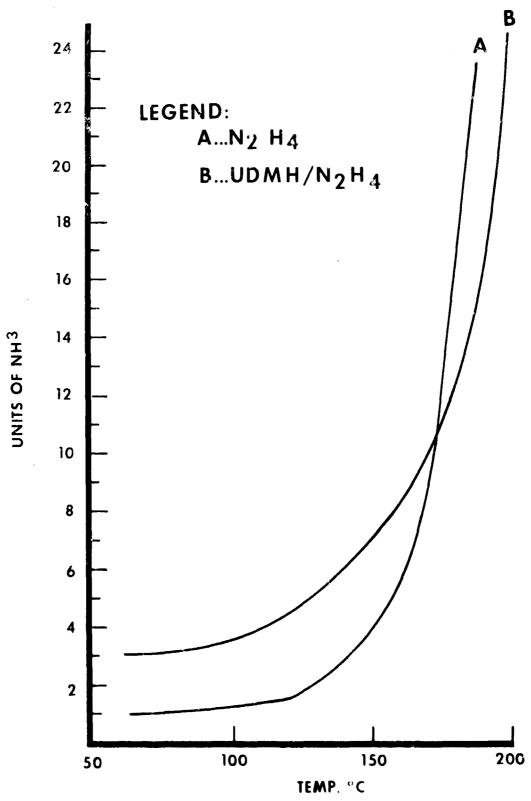


Figure 4. NH₃ From UDMH/N₂H₄ By Gas Chromatograph Method (Au/Ni Alloy)

in the dimethylamine or the UDMH content of the propellant was noted during the test it is concluded that only the hydrazine in the fuel blend had decomposed. Figure 5 depicts the results of the immersion tests on the gold/nickel alloy with hydrazine and with UDMH/hydrazine. Propellant blanks were determined simultaneously with the sample analysis. The surface areas of the alloy samples were 3.7cm² each. Although decomposition of the propellant was observed for both hydrazine and UDMH/hydrazine, the alloy samples did not change weight. A change in weight of 0.1 mg would have been detected. The hydrazine in the UDMH/hydrazine blend also decomposed more rapidly than neat hydrazine in the immersion test. The decomposition products of the N₂H₄ and UDMH/hydrazine, based on the chromatograph analyses, appear to be only ammonia, nitrogen, and hydrogen.

Hydrazine was also exposed to varying quantities of the Au/Ni alloy and decomposition rate appears to be directly proportional to the exposed surface area of the alloy. The hydrazine decomposition rates decreased noticeably after 8 to 12 hours of exposure to the alloy during the immersion tests with UDMH/N₂H₄ but not with neat hydrazine. This may have been the result of surface poisoning of the catalytic alloy.

IV. CONCLUSIONS

Gold, nickel, or the 82:18 gold/nickel alloy are definitely catalysts at 140°F for the decomposition of hydrazine. These metals appear to be selective for hydrazine, however, the presence of UDMH enhances the rate of decomposition.

A new compatibility test method (gas chromatograph method) has been devised whereby materials can be rapidly screened to provide relative data for compatibility with fluids over a wide temperature range. Future compatibility work on other materials and propellants using this technique is anticipated.

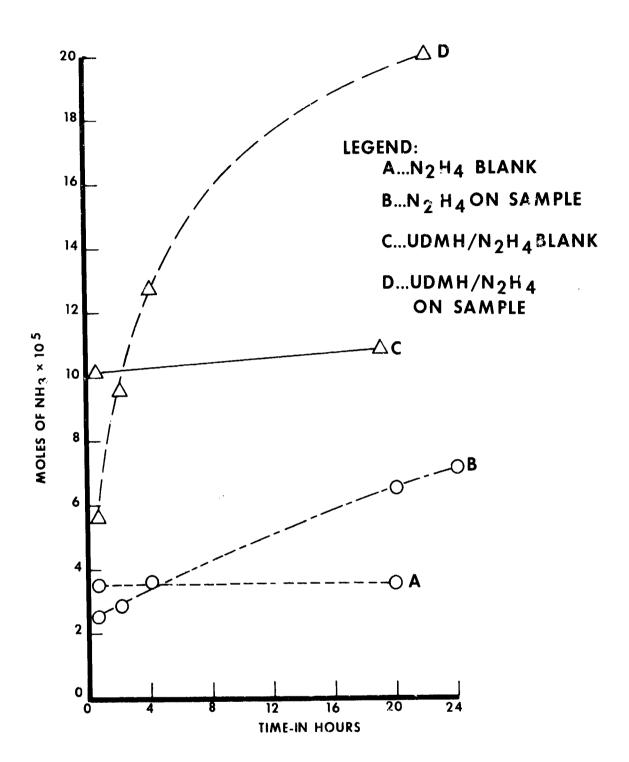


Figure 5. NH₃ From UDMH/N₂H₄ and N₂H₄ By.
Immersion Test Method (Au/Ni Alloy)
9/10

Security Classification	- · · <u></u>		
DOCUMENT CONT			
(Security classification of title, body of abstract and indexing a 1. ORIGINATING ACTIVITY (Corporate author)	annotation must or w		everall report is classified) ECURITY CLASSIFICATION
Air Force Rocket Propulsion Laboratory		Unclassi	
Edwards, California 93523	!	N/A	
3. REPORT TITLE The Catalytic Decomposition of Hydrazine of Brazing Alloy	on Gold, Nic	ckel, and	a Gold/Nickel
4. DESCRIPTIVE NOTES (Type of report and inclusive dutes) Final Report, September 1966 - September	. 1967	_	_
S. AUTHORIS) (First name, middle initial, last name) L. A. Dee, T. W. Owens, A. K. Webb and J			
e. REPORT DATE April 1969	76. TOTAL NO. OF	F PAGES	76. NO. OF REFS
84. CONTRACT OR GRANT NO.	SE ORIGINATOR'S	S REPORT NUMI	acn(3)
& PROJECT NO. 060JSSZAT	AFRPL-TF	R-69-77	
e.	sh. OTHER REPOR	RT NO(S) (Any of	ther numbers that may be assigned
4.	<u> </u>		
governments or foreign nationals may be m AFRPL (RPOR-STINFO), Edwards, California Supplementary notes		•	
1			
13. AUSTRACT			
A laboratory study was conducted to rechemical compatibility of hydrazine with gouns dimethylhydrazine/hydrazine (50:50) we metals including a gold/nickel (82:18) braziseveral missile propellant systems designe blends. Gold, nickel, and the gold/nickel locatalytically.	old. Hydraz: ere tested for ing alloy whi ed for hydraz	zine and or compatib lich is spec lizine and fo	bility with several cified for use in or hydrazine fuel
·			

DD . FORM . 1473

Unclassified

Unclassified
Security Classification LINK B KEY WORDS ROLE ROLE ROLE Hydrozine CompatibilityCatalytic Decomposition Gas Chromatography Brazing Alloy

Unclassified